


## JenLas.<sup>®</sup> D2

Diode-Pumped Thin-Disk Laser - frequency-doubled

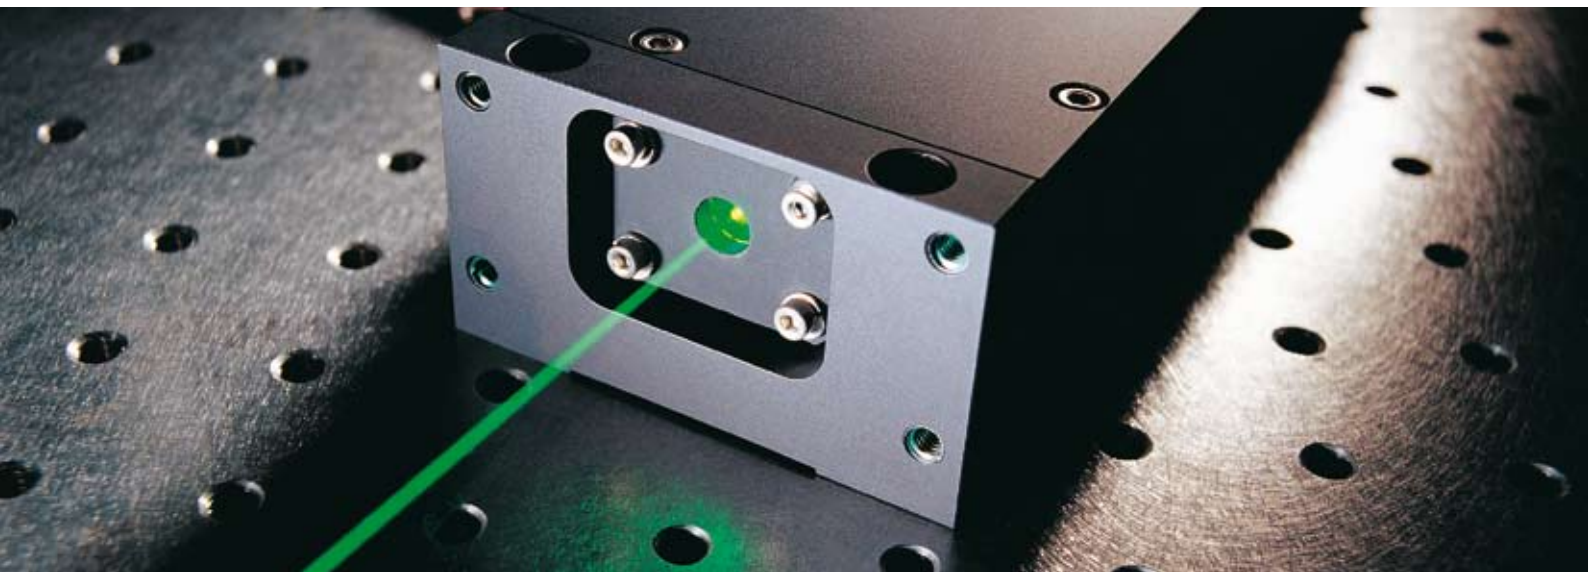

### Features:

- OEM design for easy integration
- Peltier cooling, system contains no water
- High beam quality
- Small dimensions

### Technology:

- Thin-disk laser
- Diode pumping
- Frequency doubling
- cw operation

### Applications:

- Display engineering
- Pumping of solid-state lasers
- Light exposure of plastic materials
- Medical engineering
- Show applications
- Substitution of Argon lasers

# JenLas.<sup>®</sup> D2

## Diode-Pumped Thin-Disk Laser - frequency-doubled

### Specifications


Parameters	
Laser	Thin-disk laser, diode-pumped
Laser class	4 (according to EN 60825-1)
Wavelength	532 nm
Ambient temperature	5 °C ... 40 °C

cw operation	
Output power	5 W
M <sup>2</sup> (typical)	5 (coupling into fiber with 50 µm core)
Pulse duration, switchable via diode laser current	~ 1 ms to cw

Electrical specifications	
Electrical input data	2 V, typically 30 A (at diode laser)
Input power	< 60 VA

Mechanical specifications	
Dimensions (W x H x L)	70 mm x 40 mm x 200 mm
Weight	1.8 kg

For the operation of the laser, a suitable power supply must be used that complies with the regulations relevant to the respective application. Please contact us for further technical details.

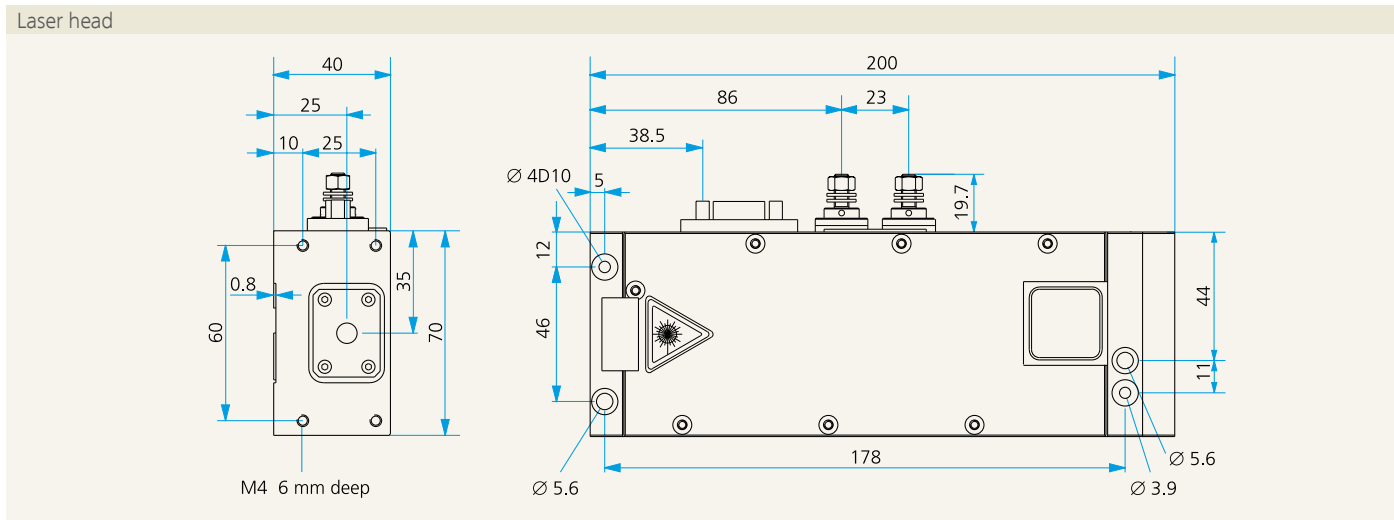

It is our policy to constantly improve the design and specifications. Accordingly, the details represented herein cannot be regarded as final and binding.



JENOPTIK Laser, Optik, Systeme GmbH  
Business Unit Laser Systems  
Goeschwitzer Strasse 25, 07745 Jena, Germany  
Phone +49 3641 65-2548 Fax +49 3641 65-3117  
E-mail: laser.sales@jenoptik.com  
Internet: www.jenoptik-los.com

